


# K261

STATIONARY KNUCKLEBOOM LOADER



## PILOT CONTROLS.

The optional right side mounted cab features a large, fully adjustable suspension seat with lumbar support, fold-up armrests with hydraulic pilot joystick controls, and a rocker swing pedal for ease of operation and increased performance. On board electric power unit is standard.

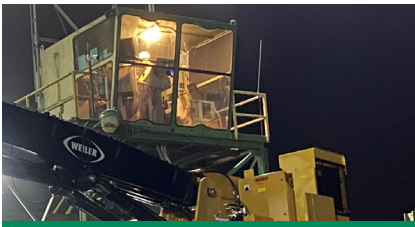

## REMOTE CONTROL OPERATION.

Loaders with optional remote controls are designed with electric over hydraulic (EHC) joysticks with proportional controllers that enable the loader to be operated from a remote location. Specially designed multi-conductor cables ensure reliable signal continuity.




## ON BOARD POWER UNIT.

The on board electric power supply and hydraulics allow for continuous or non-continuous rotation. This configuration also provides a space saving installation as all components are mounted on the loader with only the electrical harnesses routed up the mounting structure.



## RESILIENT PAD MOUNTING.

The Resilient Pad Mounting System includes a set of special rubber isolators on each mounting fastener that absorbs stress in two directions. An additional hydraulic accumulator is built into the main boom cylinder circuit to further absorb peak-load shocks.



## REMOTE POWER UNIT.

Remote electric power supply and hydraulics are placed on the ground for easier service access to the electric motor, hydraulic pumps and hydraulic valve. Hydraulic hoses are routed up the mounting structure through the center of the loader. Available in limited rotation only.



## BOOM LENGTH OPTIONS.

Heavy-duty boom options range from 25' (7.6 m) to 30' (9.1 m) for handling short wood as well as fixed and live heel options for handling tree length stems.

# K261 SPECIFICATIONS

<b>Gross Power</b>	75 hp	56 kW
<b>Electric Motor Options</b>	380 Volt / 50 Hz	
	460 Volt / 60 Hz	
	575 Volt / 60 Hz	
<b>Weight*</b>	15,915 lb	7219 kg

\*Weight includes on board electric power, 25' boom, extended V heel and 4042 SN grapple

<b>System Pressure</b>	2200 psi	152 bar
<b>Swing Pressure</b>	2400 psi	165 bar
<b>Swing Speed</b>	8 rpm	
<b>Swing Bearing Diameter (O.D.)</b>	43"	1092 mm
<b>Hydraulic Reservoir</b>	42 gal	159 L

## CONFIGURATIONS

1. On Board Electric Power w/  
Operator's Cab on loader with pilot joystick controls
2. On Board Electric Power w/  
Remote Operator's Station with electric over hydraulic controls
3. Remote Electric Power w/  
Remote Operator's Station with electric over hydraulic controls

NOTE: It is the customer's responsibility to provide the remote operator's station for configurations 2 & 3.

## MOTOR POWER SUPPLY

75 hp (56 kW) @ 1800 rpm electric motor  
380 Volt / 50 Hz Electric Power Supply option  
460 Volt / 60 Hz Electric Power Supply option  
575 Volt / 60 Hz Electric Power Supply option  
Four ring high voltage / auxiliary low voltage collector ring  
NEMA 12 enclosure service panel  
Direct pump drive through flex coupling  
Magnetic starting system

## HYDRAULICS

Three in-line gear pumps  
44-33-22 gpm (167-125-83 L/min) of flow  
Radial piston swing motor  
42 gal (159 L) hydraulic reservoir

## OPERATOR CAB - OPTIONAL

Right side mounted enclosed cab  
Pressurized with heat and air conditioning  
Adjustable seat with arm rests  
Dual pilot joystick controls with foot pedal swing  
Reverse slope tinted windshield  
Windshield wiper  
Lexan skylight  
AM/FM radio  
Sunshade

## MOUNTING KITS

Steel Platform (includes mounting bolts, lock nuts, washers, shock pads)  
Concrete Pad (includes J-hook bolts, lock nuts, washers, shock pads)  
Optional 30" (762 mm) Subframe Riser for concrete installations  
NOTE: Steel platform and/or concrete pad design are the responsibility of the customer.

## BOOM OPTIONS

25' (7.6 m) Standard Boom and Stick  
27' (8.2 m) Standard Boom and Stick  
30' (9.1 m) Standard Boom and Stick  
30' 6" (9.3 m) Live Heel Boom and Stick

## OPTIONAL EQUIPMENT

4042 Straight Narrow Jaw Grapple  
4548 Straight Narrow Jaw Grapple  
4548 Tapered Wedge Jaw Grapple  
Single "V" Heel  
Double "V" Heel  
Boom Work Lights  
Boom Central Grease Location  
Hydraulic Tank Heater  
Counterweight

## SALES AND SERVICE

Sold and serviced exclusively through Weiler Forestry dealers worldwide

## WARRANTY

12 months standard